



FAVORIT

Fire fighting hose certified to ÖNorm F2105, DIN 14.811 and a lot of other international standards. resistant to low and high temperatures, rot-proof, lightweight and smooth

WEAVING


- high tenacity multifilament polyester yarn
- circular woven, 2-ply warp threads
- hardwearing and abrasion resistant

LINING

- ageing- and ozone resistant EPDM rubber-lining
- smooth, excellent adhesion
- manufactured in a special vulcanizing process

OUTER COATING

- additional protection against mechanical and chemical damage on request

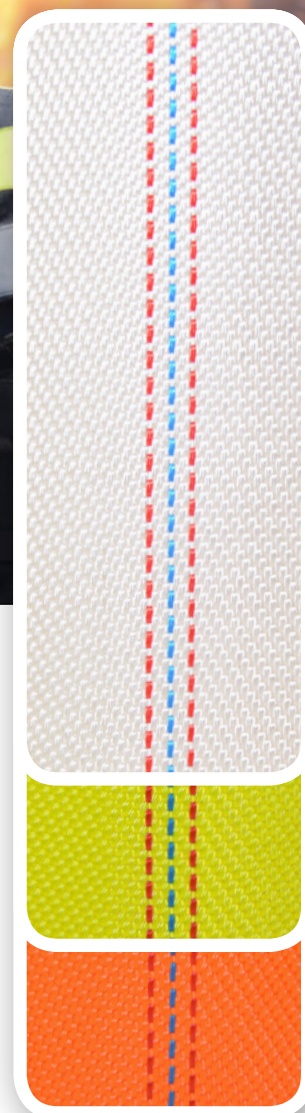

V1.0

i.d. in inch	dia. in mm	weight gr/m	WP / TP / BP in bar	article-nr.
1	25	110	16/24/60	FAW025
1 1/2	38	190	16/24/60	FAW038
1 3/4	42/45	220	16/24/60	FAW042
2	52	270	16/24/60	FAW052
2 1/2	63/65	350	16/24/60	FAW063
2 3/4	70	360	16/24/60	FAW070
3	75	430	16/24/60	FAW075
4	110	625	12/18/35	FAW110